



APPLICATION



DIMENSIONS

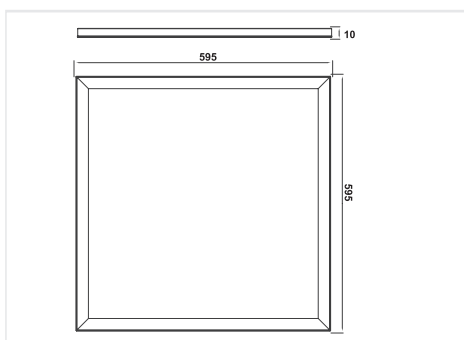

PHOTOMETRIC

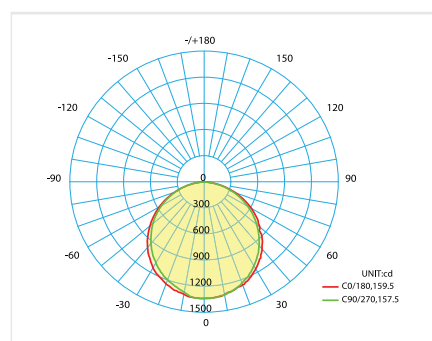

PHYSICAL CHARACTERISTICS

Installation	Recessed/ Surface
Cut - out Size	None
Depth / Height	10 mm
LengthxWidth	595x595mm
IP - Rating	IP 40
IK - Rating	IK 02
Fixture Material	Aluminum Frame with sheet steel back
Standard Finish	Electrostatic White Painting
Custom Colour	Available
Weight	2510 gm

ELECTRICAL / PHOTOMETRIC DATA

Light Source	LED Module-SMD
LED chip efficacy	150 Lm/W
Chromaticity Tolerance	3 - Step Mac Adams
Color Rendering index	Ra >80
Color Temperature	6000K
Beam Angle	120°
Glare Control	UGR < 20
Reflector/Diffuser	Opal Diffuser

SPECIFICATIONS

Code	Dimenitions	Power	Total Luminous Flux	System Efficacy
CPS-E4A40-6000K-HC	595x595 mm	40 W	4200 lm	105lm/W
CPS-E4A40-6000K-HC-EMER				
CPS-E4A40-6000K-HC-PH				
CPS-E4A40-6000K-HC-PH-01				
CPS-E4A40-6000K-HC-VS				

DRIVER OPTIONS / SPECIFICATIONS

Driver	Power	Output Current	Power Factor	Temp. °C	Efficiency η	AC operate V
Philips certa	44 W	1050 mA	>0.95	20°C~40°C	>90	220-240VAC

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
+A	220 - 240 vAC	50/60Hz	II	-25° C / + 50° C	50.000 Hrs